



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 652 178 A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **94308201.6**

(51) Int. Cl.⁶: **B65H 45/12**

(22) Date of filing: **08.11.94**

(30) Priority: **08.11.93 US 148454**

(43) Date of publication of application:
10.05.95 Bulletin 95/19

(84) Designated Contracting States:
BE DE FR GB

(71) Applicant: **XEROX CORPORATION**
Xerox Square
Rochester New York 14644 (US)

(72) Inventor: **Mandel, Barry**
3707 Atlantic Avenue
Fairport, NY 14450 (US)
Inventor: **Buddendeck, Gerald A.**
146 Timberline Drive
Penfield, NY 14526 (US)

(74) Representative: **Reynolds, Julian David et al**
Rank Xerox Ltd
Patent Department
Parkway
Marlow Buckinghamshire SL7 1YL (GB)

(54) **Automatic on-line signature booklets finisher for electronic printers.**

(57) A signatures finishing system (10) for on-line center folding of sets of signature sheets (18) outputted by a reproduction system (11); by sequentially individually fully folding the signature sheets (18) in a folding rollers (26,27) nip as they are outputted and reversing the nip at a position in which the opposite ends of the sheet (18) engage the opposite sides of a closely adjacent saddle compiler (30) to sequentially stack the folded signature sheets (18) on the saddle compiler (30) to form plural sheet compiled pre-folded signature sheet booklets, and then, after stapling (40), ejecting the compiled folded signatures booklet from the saddle compiler (30) through the same folding rollers (26,27) nip to a booklet output system which may perform edge trimming (48) and stacking (50) of the booklets ejected through the folding rollers (26,27) nip.

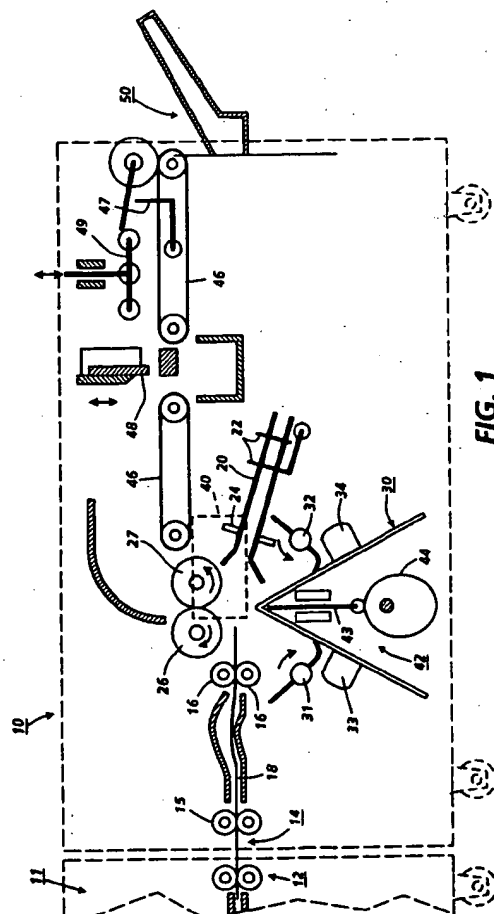


FIG. 1

EP 0 652 178 A1

Jouve, 18, rue Saint-Denis, 75001 PARIS

BEST AVAILABLE COPY

The present invention relates to "on-line finishing" of folded booklets, and more particularly to a simplified signatures finishing system providing center-folded and fastened booklets of signature collated pages outputted by an electronic printer, or other reproduction apparatus.

By way of background, it is desirable, especially as copiers and printers increase in speed and capabilities, for their paper handling and output to be more automated and made more reliable in general. "On-line finishing" is one means for such improvements. It may be roughly defined as a system in which the document pages being copied are printed in a order such that each copy set or job set comes out precollated, and thus can be automatically finished [stapled, glued or otherwise bound] in collated sets without manual handling or post-collation, starting immediately with the first set, and while subsequent copy sets of that same job are being printed by that reproduction apparatus. Preferably the finisher is integral, or a separable module at the output of, the reproduction apparatus for directly sequentially receiving the individual sheets as soon as they are printed.

"Signature" printing is an old and well known term in the art of book printing. Conventionally, a signature is a sheet printed and intended to be center folded and center fastened in pamphlet or book binders. A collated set of plural stacked signature sheets which are center folded and center fastened may provide an individual booklet, with pages which can be turned in a normal manner. That can also be called a single "quire", although the term "quire" is more commonly used where each "quire" is differently paginated and intended to be fastened together in traditional book-binding with the other quires to form a traditional book. The term "booklet" is used broadly and generally herein. Signature sheets are normally duplex (both sides) printed with 4 pages total in signature pairs page order. Often they are U.S. 11"x17" (27.9 x 43.2 cm), or European or Japanese equivalent, large copy sheets which, when center folded, form booklets of standard letter or office size. The requisite center spline stapling, stitching or gluing of collated sets of such signatures is preferably done in automatic signature [book] binders. Another term used for signature finishers is a "Signature booklet maker" or SBM. These may, or may not, collate the sets of signatures on what is called a "saddle stitcher" or "roof stitcher".

Signature binders are optional accessories for several Xerox® copier/duplicator and printer products. It is also reported that signature booklets have been commercially printed on the duplex version of the Xerox® "9700™" laser printer with signature printing software for many years. These commercial signature finisher units, from C.P. Bourg, Plockmatic International AB, and others, are set staplers / folders / trimmers which do adjustable book edge trimming as well as center stapling or stitching, center

folding, and output stacking, and may or may not do the collated set compiling. That is, they provide, in an accessory module, a stitcher, folder and trimmer for on-line signature booklet making from signature printing output, with or without copy output sheet rotators, cover or other sheet inserters, etc.. Interface sheet transports for mating the printer output level to the signature module input level may also be provided.

While signature printing and binding of booklets has been done for years to a limited extent on copiers, it is especially suitable for automatic duplex electronic printers, since the pages can be easily automatically electronically reordered and easily printed in signature rather than normal order order for signature printing. Modular signature finishers, as noted above, have been provided for and used with the Xerox® "DocuTech™" electronic printer and other electronic printer products for on-line booklet finishing. Some recent Xerox patents show in a common schematic figure, and provide some description of, the C. P. Bourg accessory signature finisher for the Xerox® "DocuTech™" printer, e.g., US-A-5,159,395 and US-A-5,184,185, Cols. 13-16 and Fig. 9. [The below cited US-A-4,891,681 is also relevant to that.] However, many of these compile the copy sets flat, and fold the set only after the entire set is compiled, which does not sharply crease the outside pages, leading to a much thicker portion of the finished book near the spline or center binding area, which tends to spring open.

Patents on the general subject of generating collated signatures at a copier output include, e.g., US-A-4,727,402; US-A-4,925,176; US-A-4,814,822; and US-A-5,241,474; and other art cited therein. Said US-A-4,727,402 also generally suggests in Fig. 2, at 113, output to a "saddle" or "roof" type collator/stitcher [an angled signatures center or spline stapler]. Also noted on signatures set staplers or stitchers are US-A-5,108,081; US-A-5,080,340; US-A-4,988,029; US-A-4,891,681; and US-A-5,161,724; and US-A-4,592,651.

Of particular interest with reference to creasing one signature sheet at a time and "inverted V" (saddle or roof) compiler stacking of plural said signature sheets for on-line booklet (signature) finishing is US-A-4,595,187. However, this system only "scores" and slightly (partially) pre-bends the sheets, rather than fully folding and tightly creasing each sheet so that it will lie flat in a finished booklet. Also, the booklets are not fully closed before ejection/stacking; and the system creases sheets in the process direction and is for long-edge fed sheets, whereas short-edge feed is more common and desirable for signatures.

For the typical large, e.g., 11 by 17 inch (27.9 x 43.2 cm), sheets printed as signatures, it is known that a sheet rotator may be provided upstream of the signature finisher: see, e.g., US-A-5,090,638. How-

ever, as noted above, this is desirably avoided, and adds space, complexity, cost, and an additional sheet jam site.

The extensive art on sheet folding in general includes, for example, on-line folders for copiers, such as US-A-5,076,556; a Xerox Disclosure Journal publication of January/February 1993, Vol. 18, No. 1 pp. 113-122; a "Research Disclosure" Publication No. 34482, December 1992, pp. 959-961, "Sheet Folding Device"; and US-A-4,518,381; US-A-4,406,649 and US-A-4,869,712. Some examples of prior patents disclosing high-capacity output sheet set stackers include US-A-5,098,074, and US-A-5,026,034, and art cited therein. An integral or modularly related copy set compiler and stapler or other finisher is disclosed in said US-A-5,098,074 and art therein, and US-A-5,137,265.

The present invention provides a system for on-line center folding of sets of signature sheets outputted by a reproduction system using a saddle compiler with two opposite sides forming an inverted "V"; characterised by comprising: a pair of reversible folding rollers closely adjacent to said saddle compiler and forming a folding rollers nip; an input sheet feeding system for feeding the central area of each outputted signature sheet into said folding rollers nip for sequentially individually fully folding said signature sheets in said folding rollers nip as they are outputted by said reproduction system; a reversible drive for said folding rollers which is automatically reversed at a position which will sequentially stack each so folded signature sheet on said adjacent saddle compiler to form plural sheet compiled pre-folded signature sheet booklets, and a set ejector for ejecting said compiled folded signatures booklet from said saddle compiler fully through said same folding rollers nip to a booklet output system, while said reversible drive for said folding rollers is re-reversed.

The invention further provides a method of on-line center folding of sets of signature sheets outputted by a reproduction system; characterised by comprising the steps of: sequentially individually fully folding said signature sheets in a folding rollers nip as they are outputted by said reproduction system; reversing said folding rollers nip with a signature sheet therein and sequentially stacking said so folded signature sheets on a closely adjacent saddle compiler; repeating said steps to form plural sheet compiled pre-folded signature sheet booklets in said saddle compiler; and ejecting said compiled folded signatures booklet from said saddle compiler fully through said same folding rollers nip to a booklet output system by re-reversing and further opening said folding rollers nip.

Preferably, the booklet output system edge trims and stacks the booklets ejected through said folding rollers nip.

Preferably, the central area of each signature

sheet is buckled into said folding rollers nip, which nip feeds the individual signature sheet partially centrally therethrough to center fold it, and then said folding rollers nip reverses before the ends of the signature sheet are in said nip to respectively feed the ends of the signature sheet out to opposite sides of said saddle compiler.

The disclosed system provides a simpler and lower cost system with improved sheet folding or creasing of each signature sheet in a finished booklet, for flatter, better stacking, and more professionally appearing finished booklets.

The present system can provide lower cost "on-line finishing" of properly folded booklets, with reduced component parts and/or overall size of the apparatus. In particular, there is disclosed in the embodiment herein a multimode, shared functions, folding and feeding rollers system, and also its integration with a simple "roof" or "saddle" type folded set compiler/stapler. With this disclosed system, the same roller set can be utilized for positively individually center creasing each signature sheet sequentially, and also for ejecting or feeding out each bound set of multiple signatures. The disclosed system can sharply crease and fold large signature sheets presented short edge first, desirably allowing a narrower processor without requiring sheet rotation or an "L" shaped path. The disclosed module accepts such printed output directly and linearly.

The present system is particularly desirable for known and future "desktop publishing" systems, because it can provide "on-line" immediate booklet printing and binding therefor. Desktop or system connected on-line publishing systems are especially suitable for rapid turn-around small to medium run magazines, internal or annual reports, sales brochures, reprints, service manuals, or any other specialized or limited publication customer needs. In "desktop publishing" systems or other integrated printing systems, a complete job such as a booklet and all its desired properties, text, graphics, desired paper stock, covers, number of copies, color of toner or ink, etc., may all be composed and/or specified at any remote terminal or workstation (with or without an accompanying "job ticket" or the like), and sent electronically to a remote and/or centralized electronic printer for printing and finishing. The printed and finished job sets may be further automatically processed by addressing and/or mailing or mailboxing distribution systems.

Information on "mailbox" output systems is available in copending, commonly assigned, EP-A-622695, EP applications 94303030.4 and 94303278.9, U.S. Applications No. 08/05492, entitled "Mailbox/Compiler Architecture", by Barry P. Mandel and Richard A. Van Dongen, and No. 08/05493, entitled "Shared User Printer Output Dynamic 'Mailbox' System", by Barry P. Mandel and David R. Kam-

prath.

The present system may, of course, be optionally combined or provided with an orbiting nip or other optional sheet output inverter and/or plural mode or other alternative outputs for unbound sheets, etc., as disclosed for example in US-A-5,201,517.

It is also additionally noted that combined facsimile and/or digital scanning, copying and printing (and even optional conventional light lens or digital direct copying) can be provided in a known manner in an integral or multifunctional or "combo" unit which may also be encompassed by the term "printer" as used herein.

The signature printing, finishing, and or other instructions and controls can be provided locally on the printer and/or the subject signature finishing module, or remotely. Examples of printer "job ticket" (job control sheet) patents include US-A-4,970,554, US-A-4,757,348, and US-A-4,987,447. Examples of patents on systems with a network, server and printer (usually for shared user's remote terminals) include: US-A-5,170,340; US-A-5,153,577; US-A-5,113,517; US-A-5,072,412; US-A-5,065,347; US-A-5,008,853; US-A-4,947,345; US-A-4,939,507; US-A-4,937,036; US-A-4,699,136; US-A-3,958,088; US-A-3,920,895; US-A-3,597,071; US-A-5,133,048, and the October 1990 publication "The Xerox DocuTech® Production Publisher" from BIS C&P International, Newtonville, MA, by Charles LeComte. Also, US-A-5,113,355 and US-A-4,651,278 and US-A-4,623,244. Other network systems publications are "Mastering Novell® Network®", 1990, SYBEX, Inc., Alameda, CA, by Cheryl E. Currid and Craig A. Gillett; "Print (Almost) Anything Anywhere", "DATAMATION", Newton MA, September 15, 1992; "Interpress™: The Source Book", Simon & Schuster, Inc., New York, New York, 1988, by Harrington, S.J. and Buckley, R.R.; and Adobe Systems Incorporated "PostScript® Language Reference Manual", Addison-Wesley Co., 1990. Such document systems can support the capabilities of remote workstations, PC terminals, and facsimile devices, and connect them for shared use of an electronic printer, usually via a print server and/or shared user interface formatting print service. The software system can also control local print job queue management, communications re job status, print options, etc..

The disclosed apparatus may be readily operated and controlled in a conventional manner with conventional control systems, such as the above and other existing ones in printers, copiers, and their controllers, e.g., US-A-4,475,156 and art cited therein. It is well known in general and preferable to program and execute such control functions and logic with conventionally written software instructions for conventional microprocessors. This is taught by various patents and commercial printers. Such software may of course vary depending on the particular function and the particular software system and the particular mi-

croprocessor or microcomputer being utilized, but will be available to or readily programmable by those skilled in the applicable arts without undue experimentation from either verbal functional descriptions, and/or drawings, such as those provided herein, together with general knowledge in the software and computer arts. Controls may alternatively be provided utilizing various other known or suitable hard-wired logic or switching systems.

As to other specific hardware components of the subject apparatus, or alternatives therefor, it will be appreciated that, as is normally the case, some such specific hardware components are known *per se* in other apparatus or applications which may be additionally or alternatively used herein, including those from art cited herein. All references cited in this specification, and their references, are incorporated by reference herein where appropriate for appropriate teachings of additional or alternative details, features, and/or technical background.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 is a schematic frontal view of one exemplary signatures finisher module in accordance with this invention;

Fig. 2 is a more detailed internal schematic frontal view of the exemplary signature finishing system of Fig. 1;

Fig. 3 is a partial schematic top view of the system of Figs. 1 and 2;

Figs. 4 to 13 are all identical to Fig. 2, and illustrate successively the operation of the system of Figs. 1-3;

Fig. 14 shows one example of a dual mode set tamper drive for both compiling sets and shifting sets for stapling;

Fig. 15 is an enlarged and more detailed view of one example of the exemplary sheet fold roll variable nip; and

Fig. 16 illustrates an alternative embodiment of a folding architecture.

Referring first to Figs. 1-3, the signature finisher 10 example here is shown directly adjacent an electronic printer 11 capable of producing and/or outputting printed signature sheets short-edge first. The printer 11 is only shown schematically, since it may be conventional, and thus need not be further described herein. The cited and other art provides examples and alternatives.

There is disclosed in this example 10 a compact, low cost, saddle stitching booklet maker capable of producing tightly folded booklets that lie flat. The system 10 uses a unique fold roll system and compile tray geometry and paper path that enables the individual signature sheets to be individually bucked and fully folded with a sharp crease sequentially as they are outputted by the printer, before compiling, and then

readily compiled folded into a set, quire, or other such booklet on a "roof" or "saddle" compiler cooperatively adjacent the fold roll system. This enables each sheet in each booklet to have a tight crease and full fold, for flat-lying professional looking booklets. The illustrated finishing device 10 also includes a set of dual function tampers that compiles the individual sheets on a "roof" or "saddle" compiler, and also move the compiled set into position for stapling. Set ejection from the compiler is provided in this example by an ejecting knife edge or fingers, but into and through the same fold roll system which previously folded the individual sheets thereof, saving space and apparatus.

By way of background, booklets which are made by compiling first, before the sheets are folded together, i.e., folded as a set (whether stapled before or after folding), have a problem. Although the innermost sheets of the set are folded reasonably tightly, the folds in the outer sheets of the set are formed around those inner sheets, and thus around a radius. For this reason, the outer sheets are not folded with a tight crease, and have a tendency to spring back open and/or for the folded end of the booklet to "bulge". Thus, it is preferable to sharply and fully fold each sheet individually before compiling them into sets. However, heretofore this has required relatively large and complex finishing equipment, or delays and/or manual handling of the sheets. Here, the sheets are immediately sequentially folded and compiled automatically, on-line.

As will be further described in the examples herein, fold rolls such as 26, 27 are provided which sequentially fully fold each incoming sheet. Those fold rolls are desirably positioned directly over an "inverted V" or saddle-shaped compiler 30 so that the reversal of the feed rolls (and gravity) can sequentially place each folded sheet directly onto the compiler. After a set has been so compiled, stapling may then be provided while the set is on the same compiler. Here a pair of staplers 40 is schematically illustrated respectively mounted inboard and outboard of the fold rolls, so as not to interfere therewith. Tampers 33, 34 associated with the compiler may be used to slide the compiled set laterally (along the compiler axis) to these inboard and outboard staplers 40 for stapling (or to sequentially step through appropriate stapling positions past a single stapler, if that is desired). The stapled set ejection system 42 may desirably include a lift mechanism located directly under the compiler to eject the stapled booklet up in to the same fold rolls 26, 27. The fold rolls feed the set on to an exit transport, for entrance into a trimming station for edge trimming, and then ejection of the completed set into a set stacker.

Fig. 14 shows an example of a dual mode set tamer drive which can provide both compiling of the sets in evenly aligned stacks in the compiler and also the above-noted shifting of the sets for stapling. This is

done here with only two pairs of tampers on each side of the compiler. One of the tampers of each pair is provided with dual motions, that is, a motion towards the other tamer for tamping the stack edges during compiling, and then a different, synchronous, motion together to slide the entire set back and forth for stapling (and/or for set ejection). Although independent drives could be used for the front and rear tampers, the system disclosed in Fig. 14 enables this dual mode operation with only one drive motor, one drive belt, and a simple clutch changing the engagement of one of the tampers from one side of the drive belt to the other, so as to reverse the motion of that tamer, since the opposite sides or flights of the belt are moving in opposite directions.

As further illustrated in Fig. 15, the fold rolls 26, 27 are spring loaded together to provide a variable nip. One of the rolls may be on a fixed axis and conventionally driven, although a stepper motor or servo motor system drive may be desirable to enable more accurate velocity and positioning control, as well as the drive reversal described below. The other or idler roller defining the fold nip may be pivotally spring mounted so as to enable that idler roll to move relative to the driven roll, so that the roll nip may be spread apart slightly during the folding of a sheet, and then spread apart substantially further for the ejection of the folded set of multiple sheets through the same nip.

It will be appreciated that the roof compiler stapler, set ejector, set exit transport and set edge trimming station examples here can be similar to various of those in existing booklet makers, and thus further details of these subsystems need not be disclosed herein.

Turning now to the operation of the first exemplary device herein, this is sequentially illustrated in Figs. 4 through 13. Note that in these figures the staplers are not shown, for clarity.

In Fig. 4, the first signature sheet 18 is shown entering from the printer 11 (not shown in these views) from its output 12. The sheet enters the directly adjacent communicating sheet input 14 of the automatic book binding module 10. This sheet input 14 here includes upstream rollers 15 and downstream rollers 16 and an intervening buckle chamber. The rollers 16 are temporarily stalled here in a conventional manner to slightly buckle the sheet for purposes of deskewing the incoming sheet immediately before the entrance to the folder system. However, it will be appreciated that if the sheets are entering the module 10 already sufficiently deskewed or unskewed, that this input system may not be required.

Referring now to the next step shown in Fig. 5, the sheet 18 is now fed out by the deskewing rollers 16 into a fold plate or chute 20 until the lead edge of the sheet 18 reaches a fold plate gate 22 at the desired stopping position of the sheet, which is with the lead-

ing area or approximate front half of the sheet 18 in the fold plate 20. The position of the fold plate gate 22 will of course vary or be reset depending upon the size of the signature sheet to be folded and its desired fold line location. (Central sheet folding is shown here.)

Note that as the sheet 18 enters the folder area it passes directly under the nipped pair of fold rolls 26, 27, which, during this sheet entrance movement, are turning in the direction illustrated by the movement arrows thereon, so as to prevent the lead edge of the sheet from stubbing and catching on the right hand fold roll 27. Also note that the sheet 18 is fed in directly over and above the "saddle" or "roof" compiler 30, which is in the shape of an "inverted V" pointing directly towards the nip of the fold rolls 26, 27 with the peak or ridge of the "V" relatively closely adjacent to this nip.

Referring now to Fig. 6, once the lead edge of the entering sheet has passed a fold plate sensor 24, the fold rolls 26, 27 reverse direction, as shown in this Figure. As soon as the lead edge of the sheet 18 hits the fold plate gate 22, the central portion of the sheet 18 begins to buckle upwards toward the nip of the feed rolls 26, 27, as shown. This is assisted by the slightly downwardly inclined angle of the fold plate 20 relative to the sheet entrance nip feed rollers 16, which rollers 16 continue to push in the trailing portion of the sheet, to continue to increase the buckling of the sheet, as shown in Fig. 7.

Thus, as shown in Fig. 7, the center of the sheet is buckled up into the nip of the fold rolls 26, 27 and drawn into these fold rolls and fed therethrough to be firmly creased and fully folded together by a substantial nip spring pressure provided between the fold rolls 26 and 27. However, the entire sheet 18 is not drawn all of the way through the fold rolls 26, 27. After the former lead edge (now one of the trailing edges) of the sheet 18 unblocks the fold plate sensor 24, and after that end of the sheet has been pulled out of the fold plate 20 by the fold rolls, the fold rolls 26, 27 are stopped, as shown in Fig. 8.

As shown in Fig. 8, the fold rolls 26, 27 stop with the now-folded sheet in a position such that the two trail edges of that sheet are released from the fold plate 20 and also from the entrance nip roller 16. Thus, these sheet ends follow their natural tendency (from both beam strength and gravity) to move towards each other, as shown. However, the distance between the nip of the fold rolls and the upper edge of the compiler 30 is less than the distance between the nip of the fold rolls and the edge of the fold plate. Thus, the two ends of the folded sheet 18 cannot fully close, and are prevented from doing so by the two sides of the compiler 30, which the sheet ends respectively now engage.

As shown in Fig. 9, the fold rolls 26, 27 are now reversed, and the folded sheet 18, also with the as-

sistance of gravity, is driven down onto the saddle compiler 30. For the final downward movement of the folded sheet 18 onto the compiler 30, after the spline of the folded sheet is released from the nip of the fold rolls, paddle wheels 31, 32 may be provided to respectively engage the two sides of the sheet now riding down on the two sides of the "inverted V" compiler 30 (or onto the previous sheets so stacked thereon, if any). Because the paddle wheels 31, 32 have long flexible blades, they can accommodate the increasing height of the sheets stacked on the compiler and remain in contact with only the outermost or top sheet. [Meanwhile, as shown in Fig. 10, the next incoming sheet is being folded, as described above.]

Pairs of tampers 33, 34 are provided inboard and outboard of the sheets stacked on the compiler 30 for moving the sheets by their lateral edges into a desired registration position. As each further sheet is inputted, folded and placed on the compiler 30 in the same manner as described above, these pairs of tampers 33, 34 move toward each other to align the sheets in a fully aligned stack.

Referring to Fig. 11, after the complete set of collated sheets has been compiled into a booklet of all the printed pages for that booklet, the operation of the tampers 33, 34 may be changed, as described elsewhere herein, and illustrated for example in Fig. 14, to drive the set laterally under the staplers. It will be appreciated that this is not required, but is desirable here for the provision in this example of staplers which are in the front and rear (inboard and outboard) of the fold rollers 26, 27. Thus, the set may be moved outboard frontwardly toward the front stapler, and then rearwardly under the rear stapler, to "saddle stitch" the set in at least two spaced positions along its folded center or spine, conventionally. Alternatively, a single stapler could be used, and the set could be shifted by a greater distance along a longer axis compiler 30, to enable the same stapler to staple the set in at least two locations. Alternatively, one or more staplers could be moved or swung into the folder space to staple the set without moving the set out of its initial compiler position.

Referring now to Fig. 12, here the set is repositioned in its central or compiling position on the compiler 30 after stapling, so that a set ejection mechanism 42, here comprising a spline knife edge or blades member(s) 43 driven by an eccentric cam 44, may push the set up (from the inside of its spline) into fold rolls 26, 27, which are now rotating in the direction shown here. Spring mounting of these rollers, such as noted herein elsewhere and shown in Fig. 15, allows the nip to open enough to accommodate the full set thickness and positively feed the entire set out through the same nip previously used to individually fold the sheets of that set.

Thus, as shown in Fig. 13, the entire set is now ejected by the fold rolls 26, 27 out onto a set exit trans-

port 46, where it is transported until it is stopped by a set trim gate 47 engaging the downstream or spline end of the stapled booklet. An adjustable position edge trimmer or knife 48 then comes down to trim off the downstream or loose end of the booklet in a conventional manner to provide a commercially desirable completely square or cut end booklet, irrespective of the number of folded sheets in the set. This may be assisted as shown by a set holddown or clamp 49. The trimmed set is now ejected by now opening the set gate 47 and operating the exit transport 46 to further feed the set out from the unit 10 onto a set stacker elevator 50. As shown here, this may be integral of the end of the unit 10. It may move down automatically to accommodate the stacking of a substantial number of finished sets in a known conventional manner. The sets are desirably stacked with the spline or folded and stapled end outwardly, for ease of operator removal, without requiring any inversion of the sets.

Referring now to Fig. 16, there is illustrated an alternative embodiment of the folding architecture. This is another example of several possible variations on the architecture shown in the previous figures. For example, by providing additional upstream fold rolls, or moving the fold roll nips further above the saddle compiling station, and providing an upstream fold plate stop therefor, a conventional folding device can be used to perform the prefolding function. This yields a less compact booklet making architecture, but enables the device to also function as a conventional folder for optional letter or "Z" folding, etc. Such a standard buckle folder may have an optional direct exit for folded single sheets upstream of the compiler/stapler unit, as shown in Fig. 16.

As also shown in Fig. 16 another or additional option is for the previously illustrated fold plate 20 system to be located parallel to the right side of the compiler 30. An additional deflector gate can be provided above the left (upstream) side of the compiler, as shown, to deflect down the trailing half of the prefolded sheet down onto the left or trail edge side of the compiler.

In any case, the sheets may be sequentially individually fully centerfolded and then directly placed on the directly adjacent saddle compiler for compiling and stapling, and with positive control over the open ends of the prefolded sheets, so that they do not close before the folded sheet is placed on the compiler.

Claims

1. A system for on-line center folding of sets of signature sheets outputted by a reproduction system using a saddle compiler with two opposite sides forming an inverted "V"; characterised by comprising:
 - a pair of reversible folding rollers closely

adjacent to said saddle compiler and forming a folding rollers nip;

an input sheet feeding system for feeding the central area of each outputted signature sheet into said folding rollers nip for sequentially individually fully folding said signature sheets in said folding rollers nip as they are outputted by said reproduction system;

a reversible drive for said folding rollers which is automatically reversed at a position which will sequentially stack each so folded signature sheet on said adjacent saddle compiler to form plural sheet compiled pre-folded signature sheet booklets; and

a set ejector for ejecting said compiled folded signatures booklet from said saddle compiler fully through said same folding rollers nip to a booklet output system, while said reversible drive for said folding rollers is re-reversed.

2. The system of claim 1, wherein said sheets are so reversed after being center folded in said folding rollers nip by said reversible drive at a position in which the opposite ends of the sheet engage said opposite side of the saddle compiler to provide positive control of the folded sheet ends and to prevent closure of the folded sheet ends before said compiling.
3. The system of claim 1 or 2, wherein said folding rollers nip is substantially expandable for feeding said compiled booklets therethrough versus said folding of individual signature sheets therein.
4. The system of claim 1, 2 or 3, further including a stapling system for stapling said compiled booklet while it is on said saddle compiler.
5. The system of any of the preceding claims, wherein said booklet output system includes a booklet edge trimmer and booklet stacker for edge trimming and stacking the booklets ejected through said folding rollers nip.
6. The system of any of the preceding claims, wherein the central area of each signature sheet is buckled into said finishing rollers nip by said input sheet feeding system, and said folding rollers nip feeds an individual signature sheet partially centrally therethrough to center fold it, and then said nip reverses substantially before the ends of the signature sheet are in said nip to respectively feed the ends of the signature sheet out to said opposite sides of said saddle compiler.
7. A method of on-line center folding of sets of signature sheets outputted by a reproduction system; characterised by comprising the steps of:

sequentially individually fully folding said signature sheets in a folding rollers nip as they are outputted by said reproduction system;

reversing said folding rollers nip with a signature sheet therein and sequentially stacking said so folded signature sheets on a closely adjacent saddle compiler;

repeating said steps to form plural sheet compiled pre-folded signature sheet booklets in said saddle compiler; and

ejecting said compiled folded signatures booklet from said saddle compiler fully through said same folding rollers nip to a booklet output system by re-reversing and further opening said folding rollers nip.

8. The method of claim 7, including the step of reversing the sheets after they have been center folded in said folding rollers nip at a position in which the opposite ends of the sheet engage the opposite sides of the saddle compiler to provide positive control of the folded sheet ends and to prevent closure of the folded sheet ends before compiling.
9. The method of claim 7 or 8, including the step of opening said folding rollers nip substantially further for feeding said compiled booklets there-through versus said folding of individual signature sheets therein.
10. The signatures finishing system of claim 7, 8 or 9, further including the step of center stapling said compiled booklet while it is on said saddle compiler.

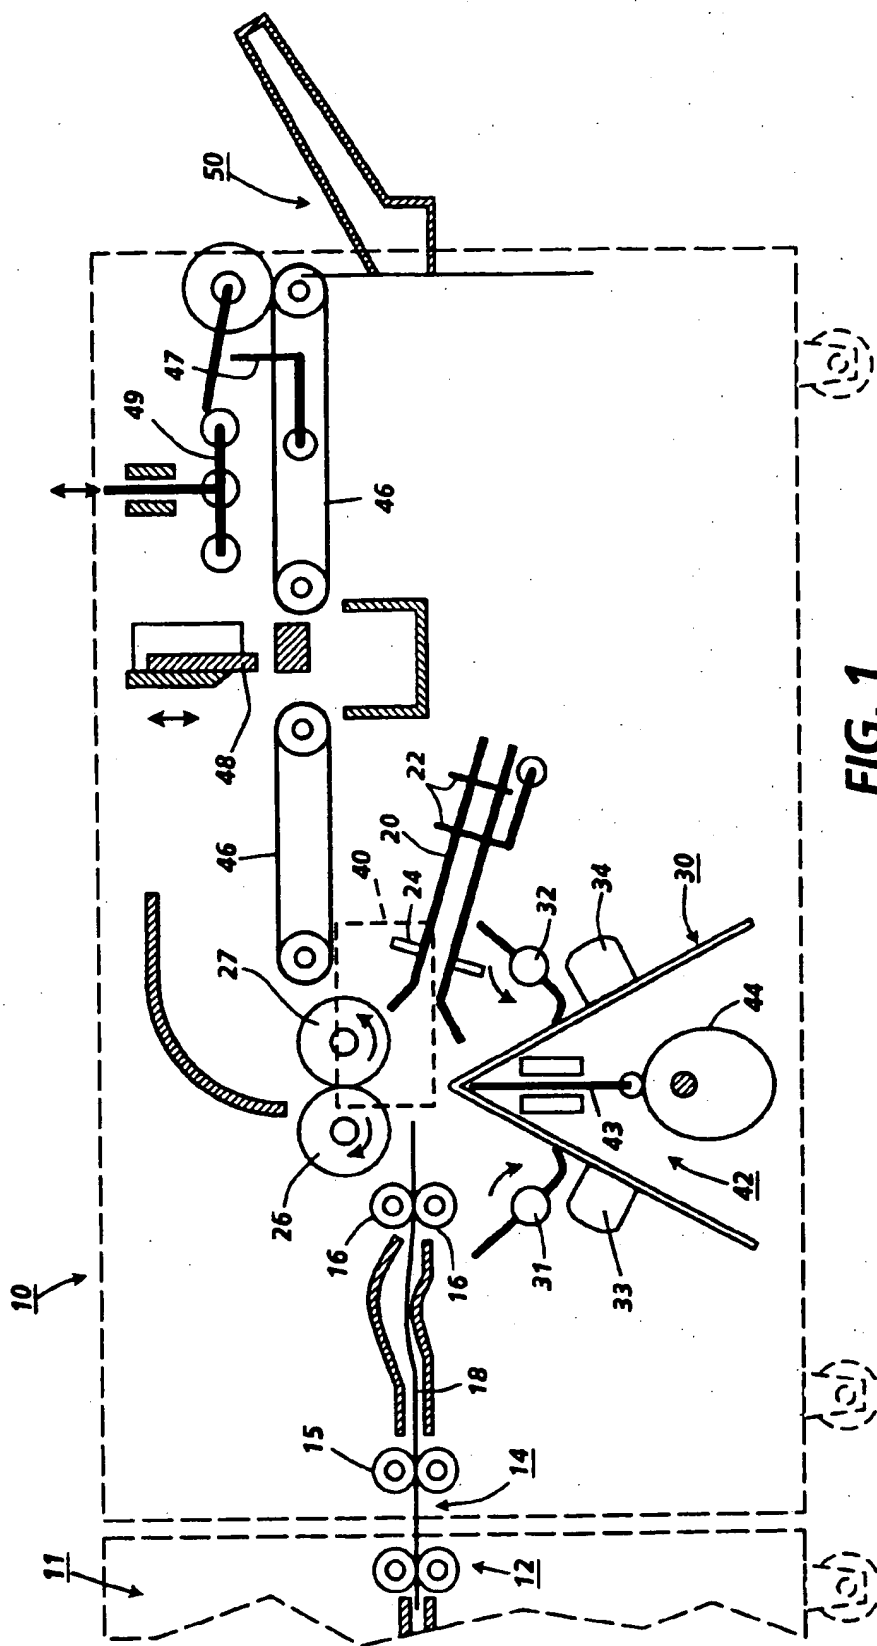


FIG. 1

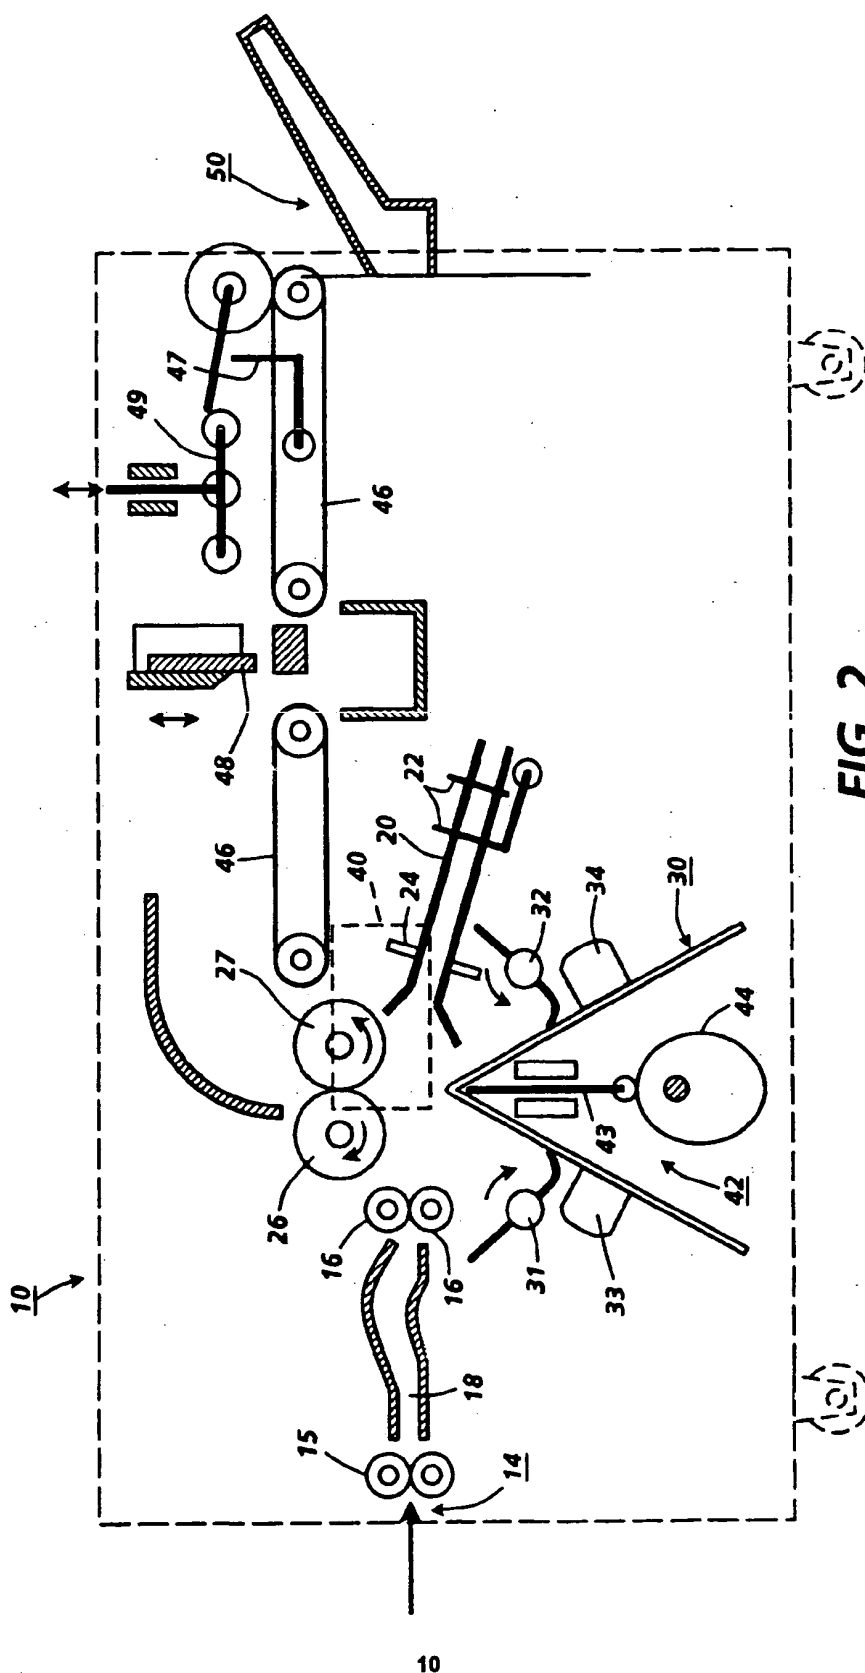
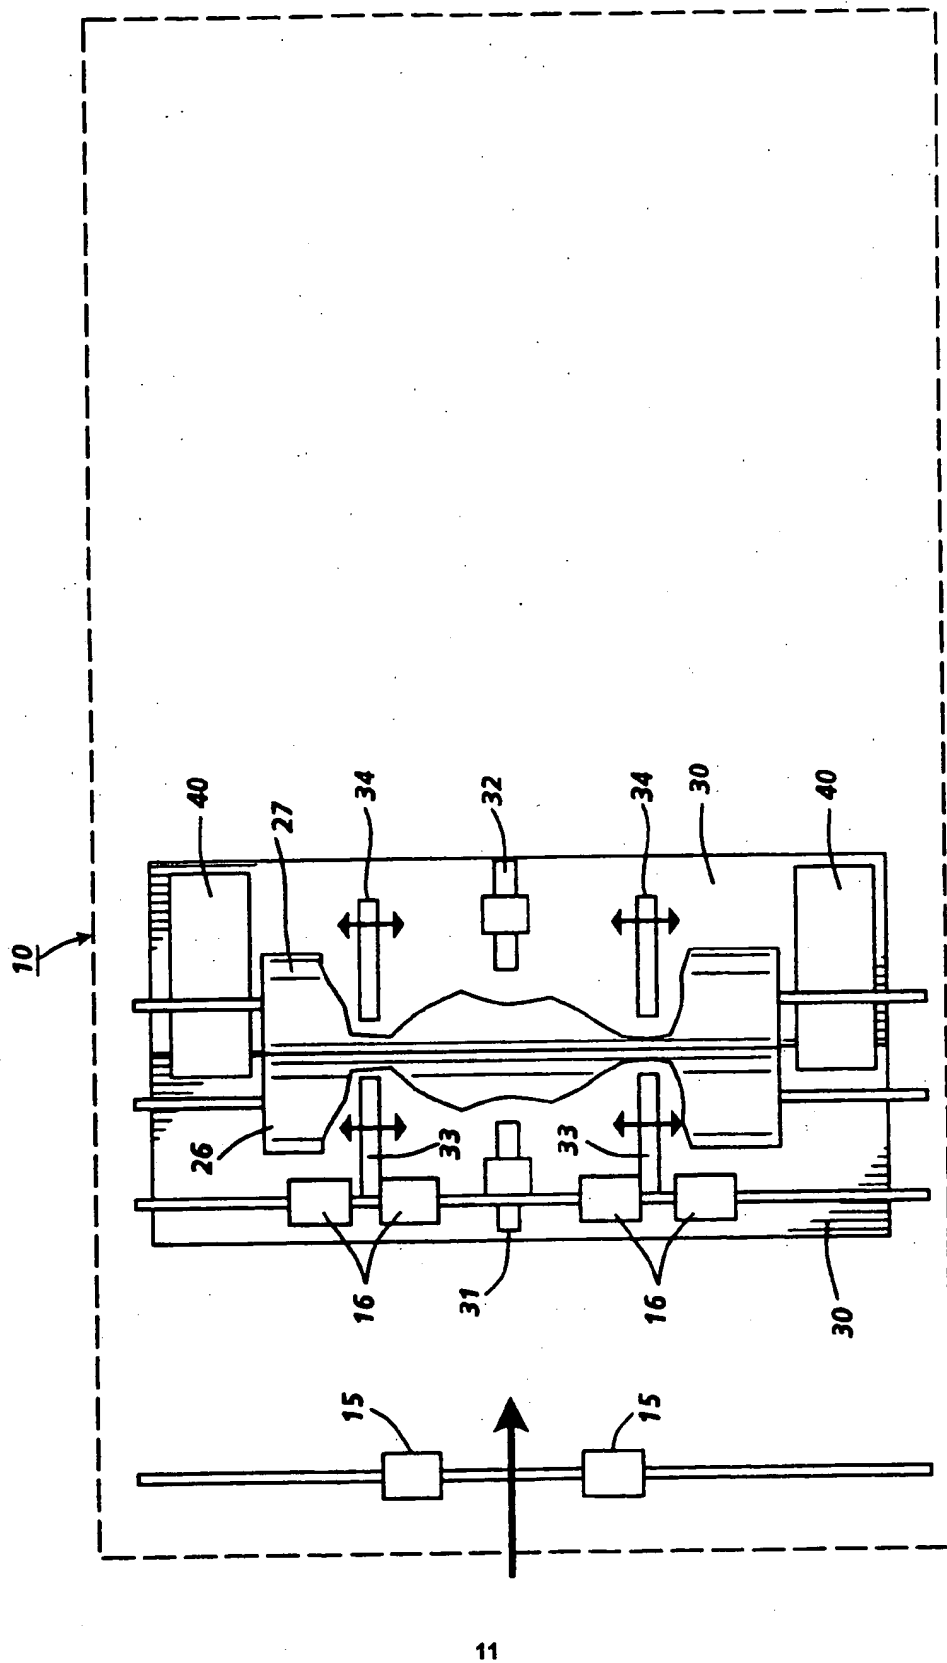


FIG. 2



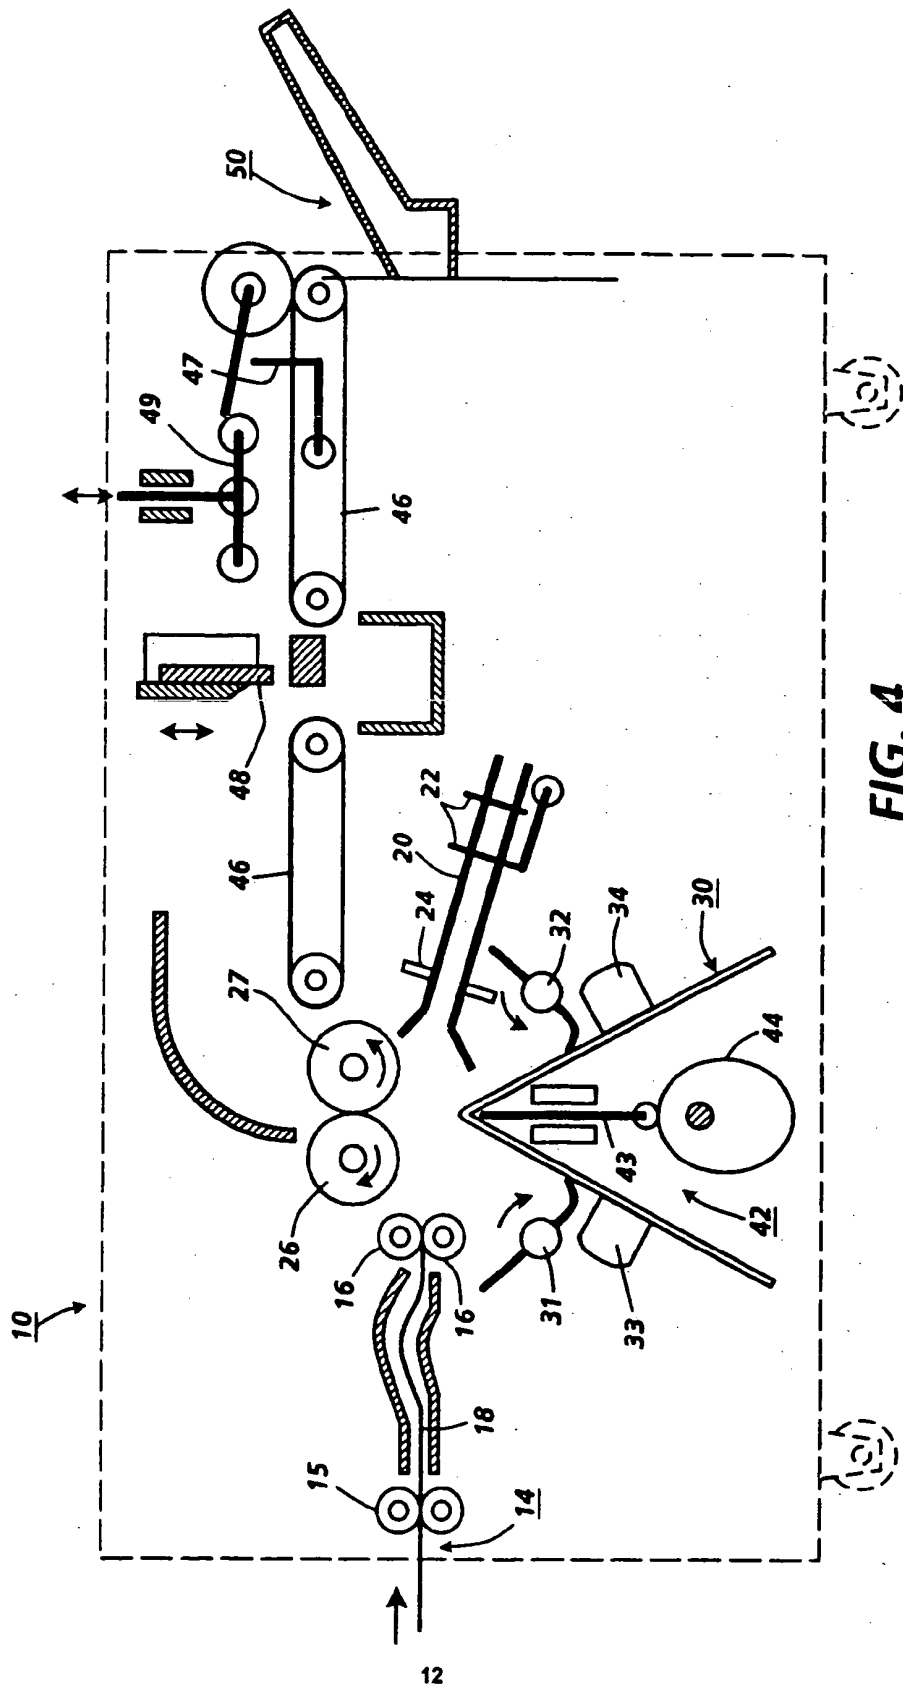


FIG. 4

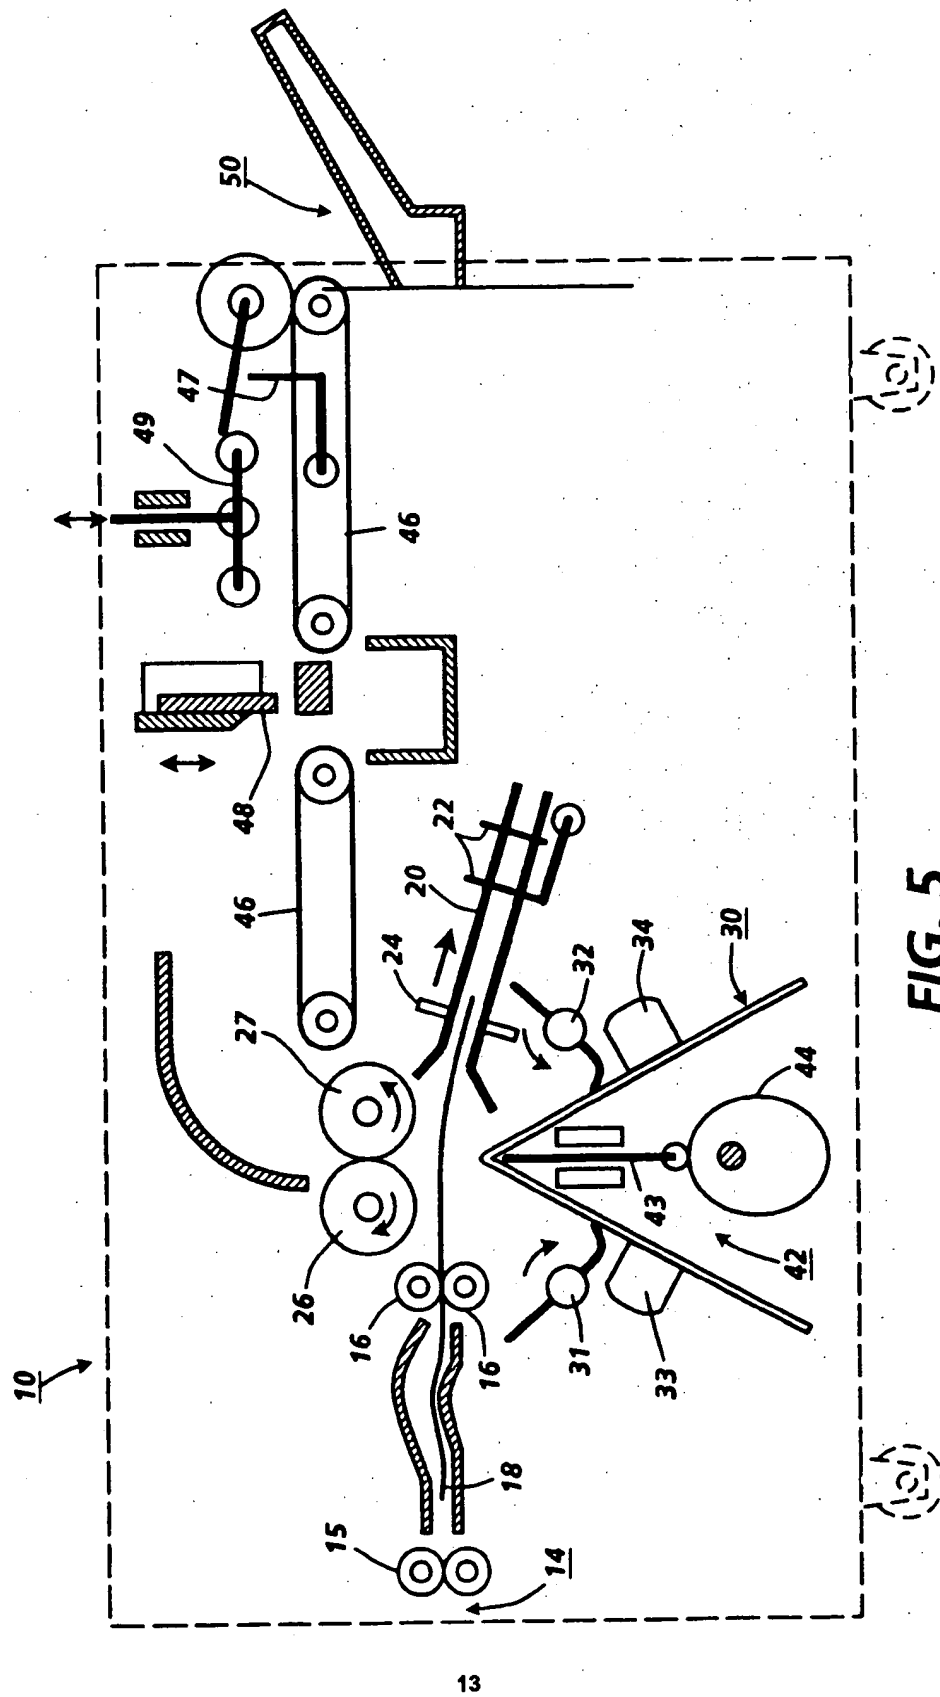


FIG. 5

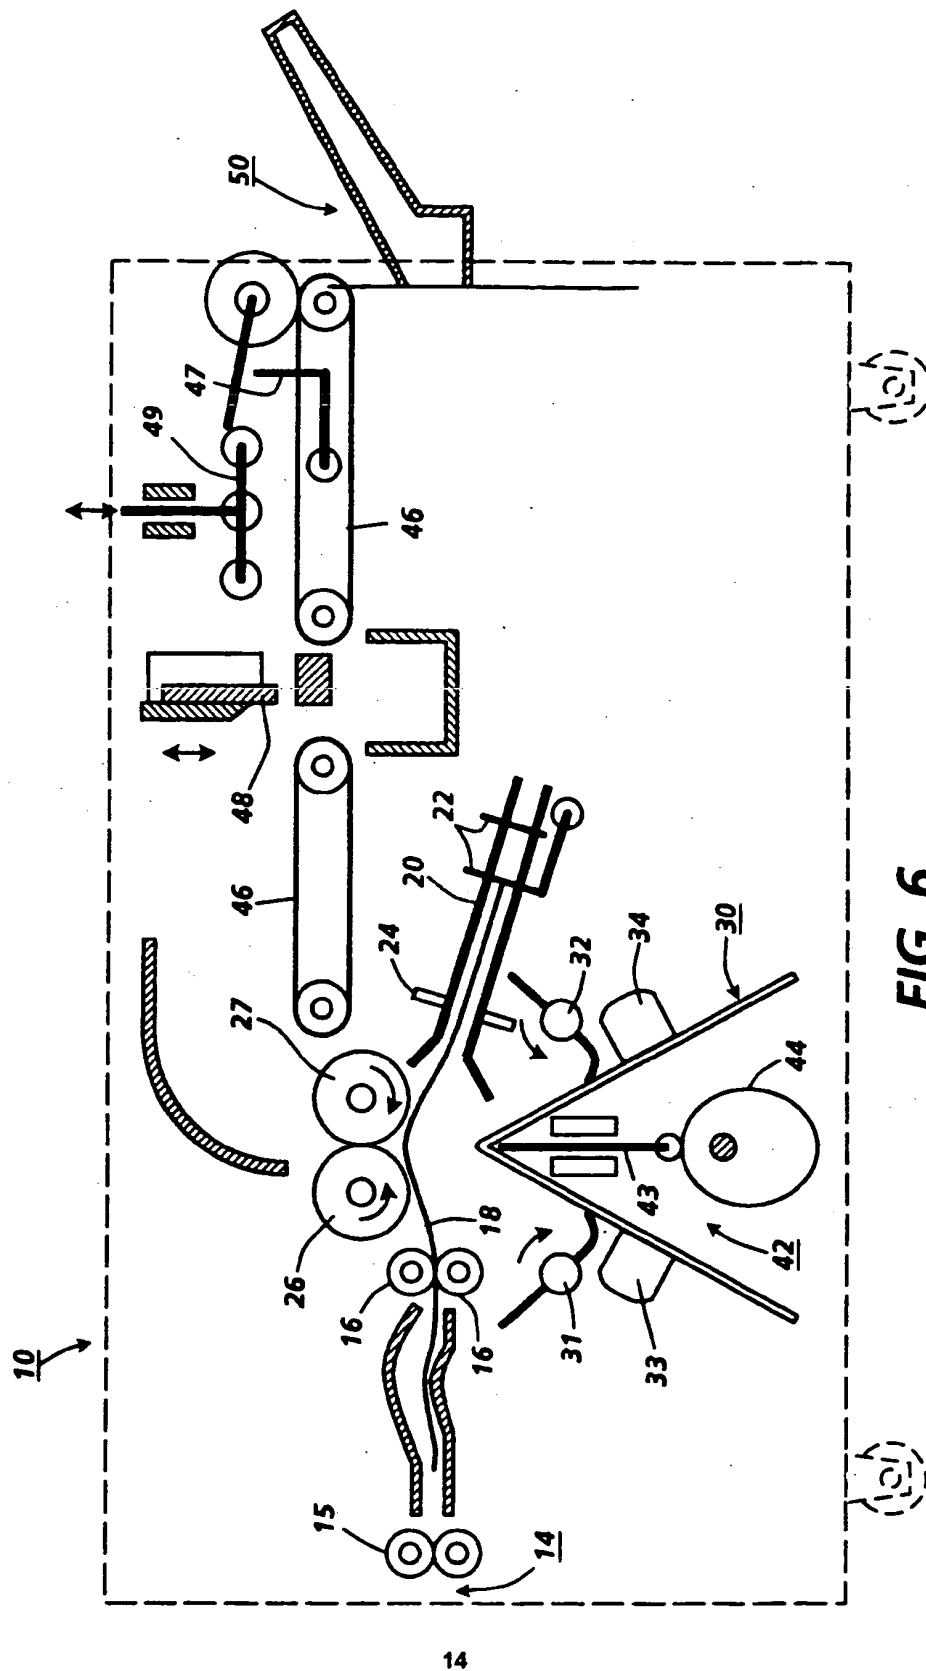
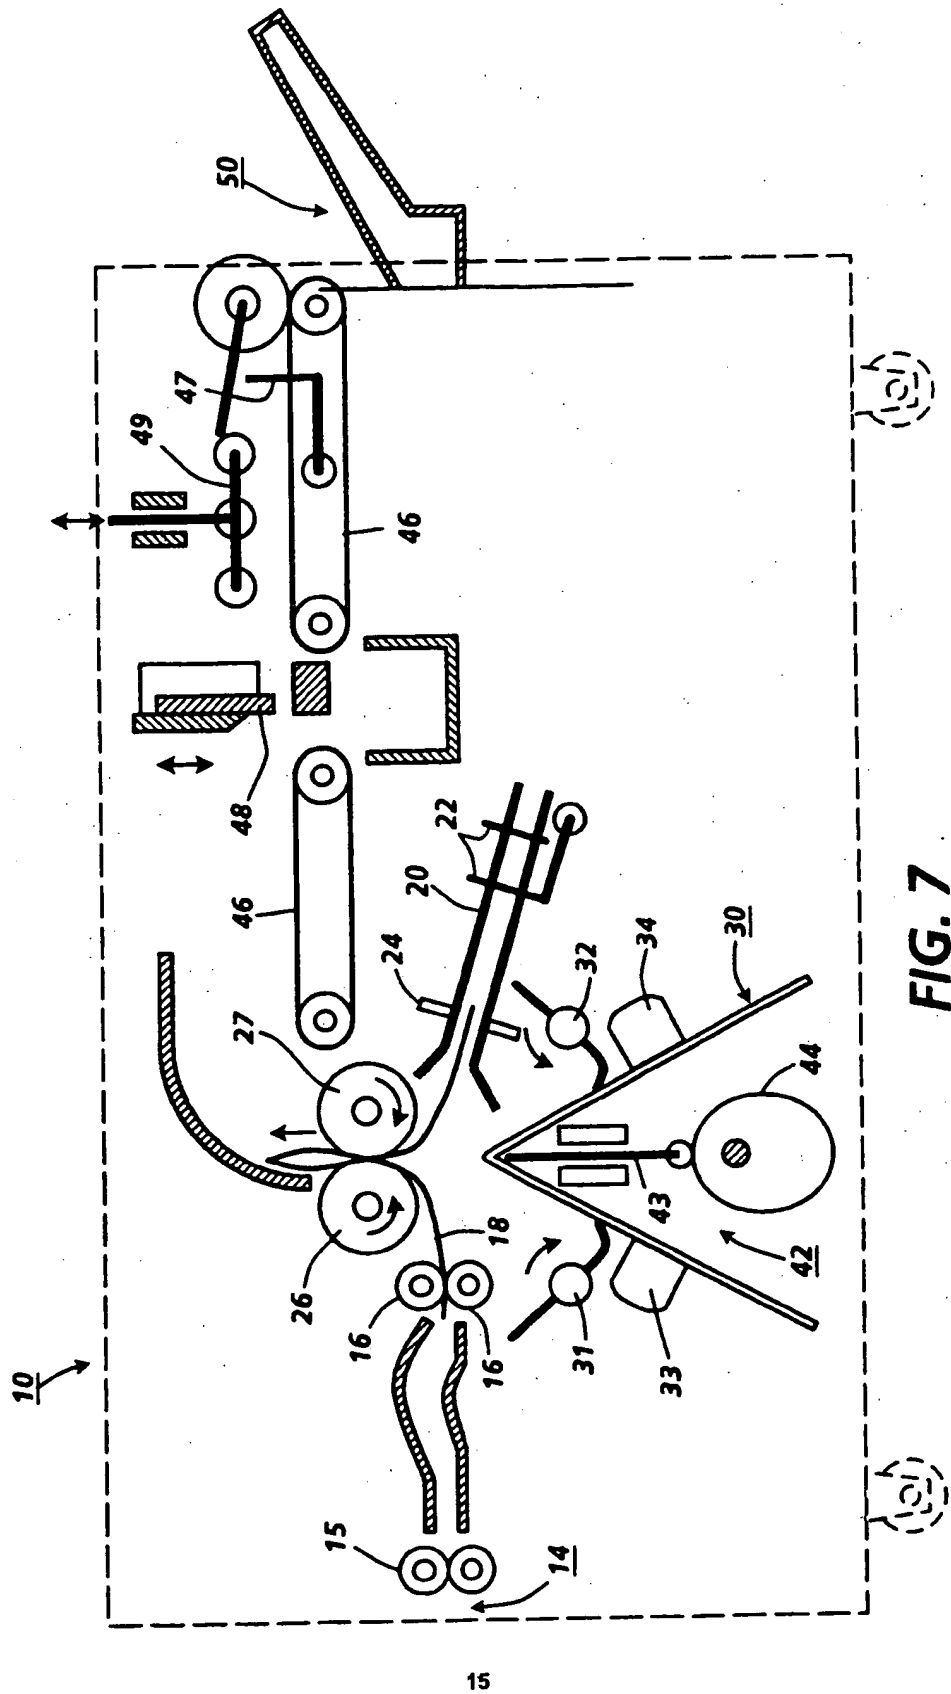


FIG. 6



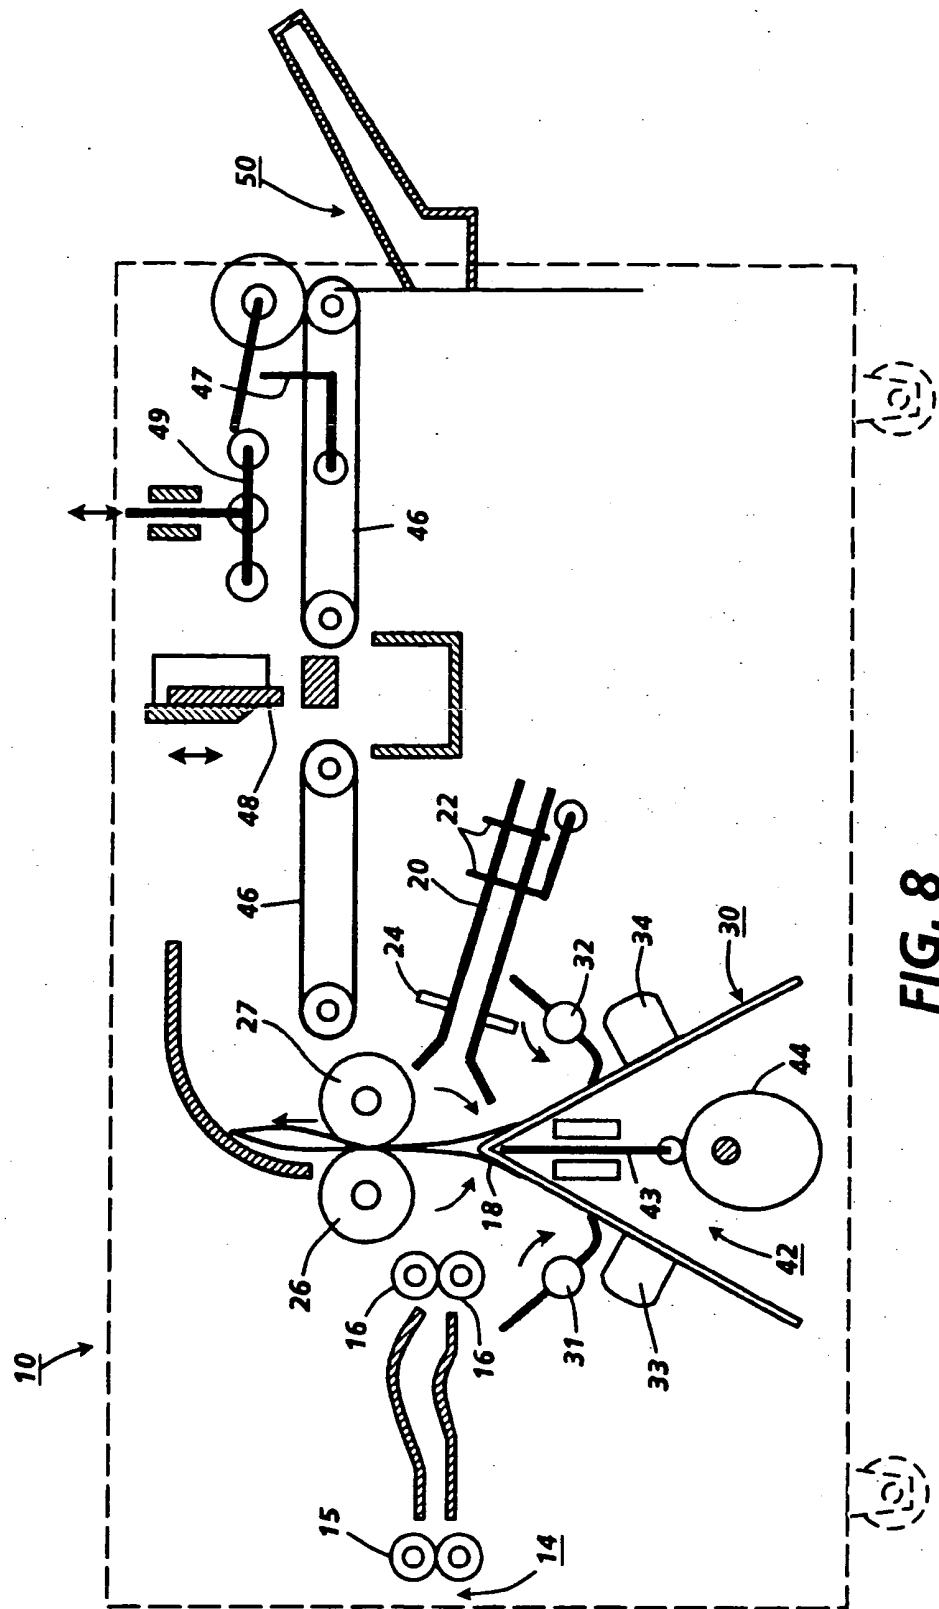
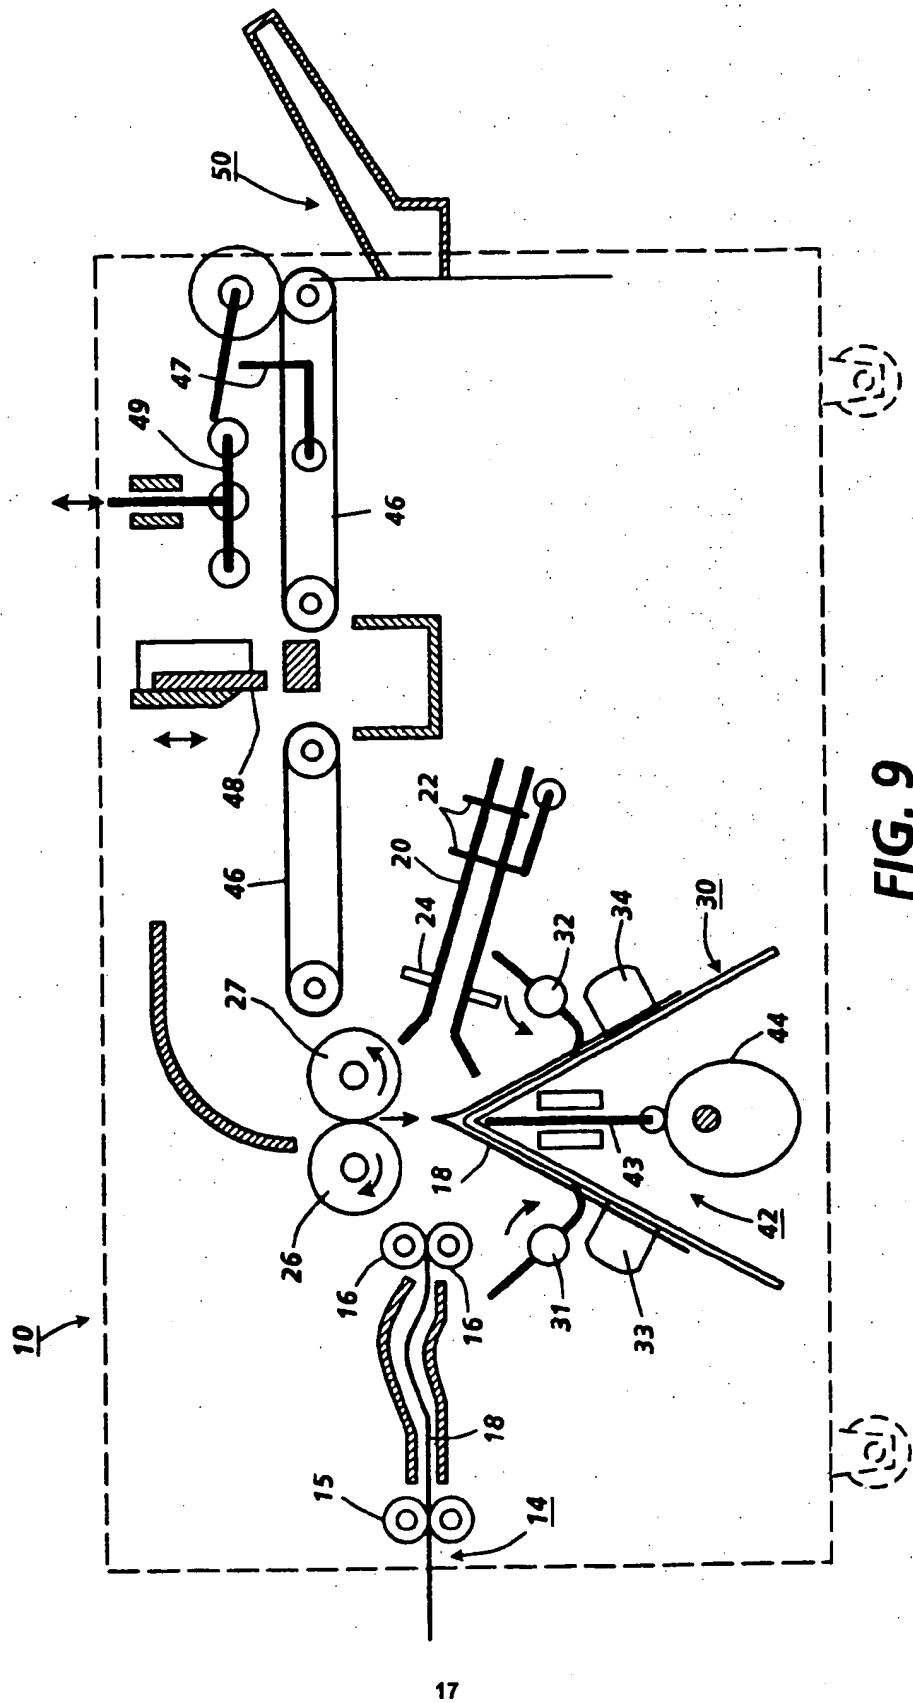
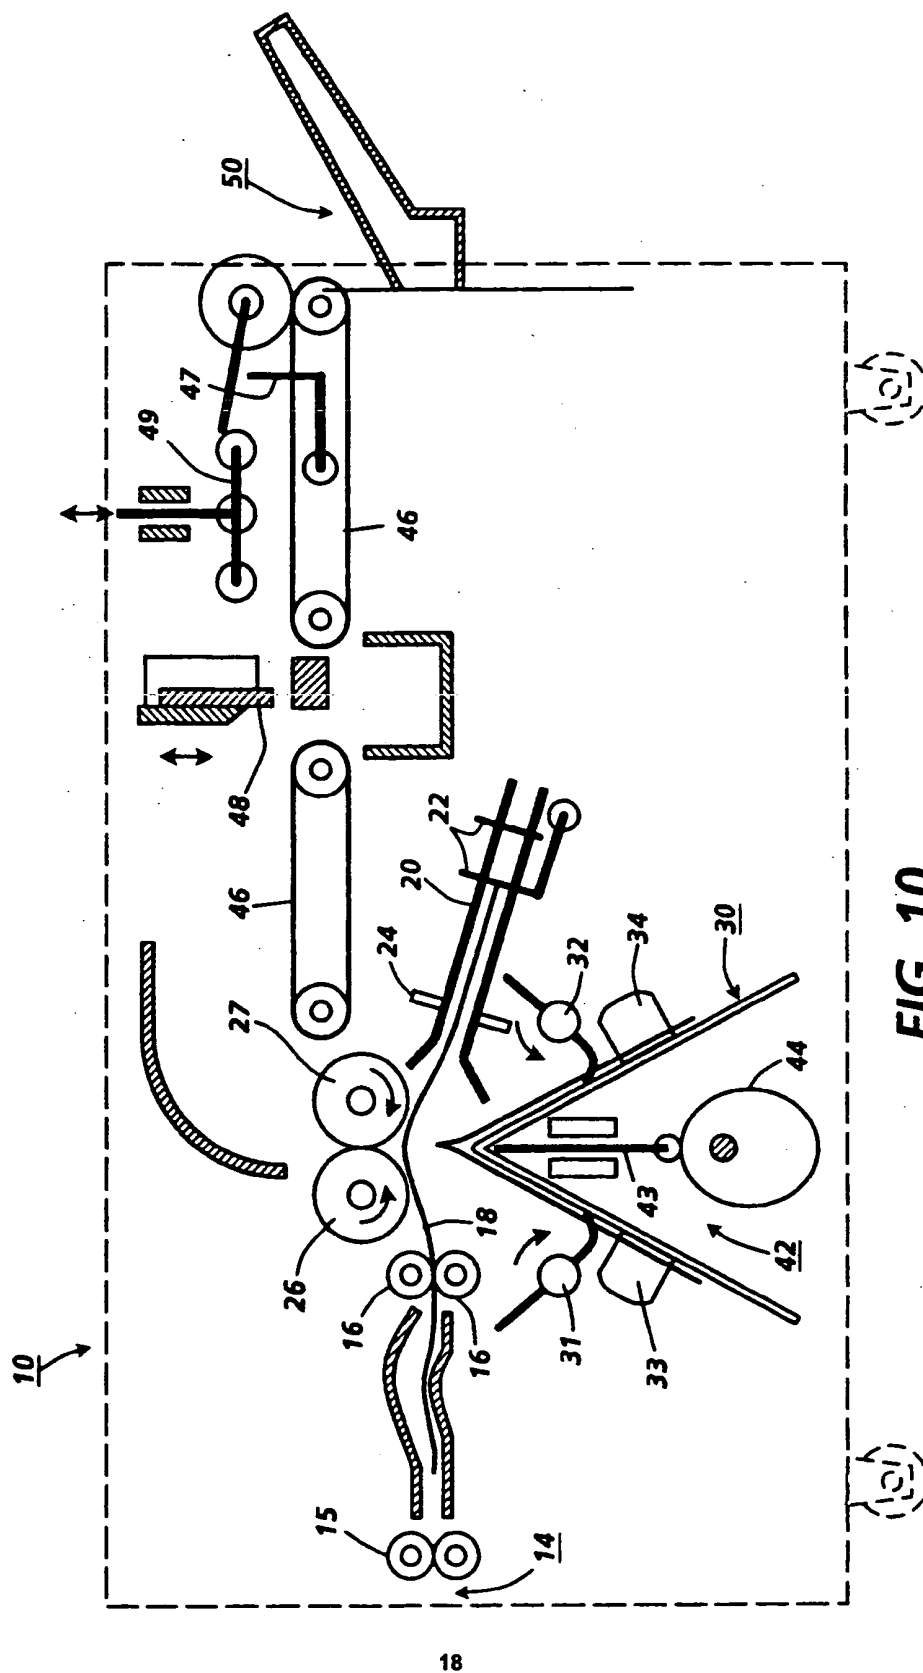
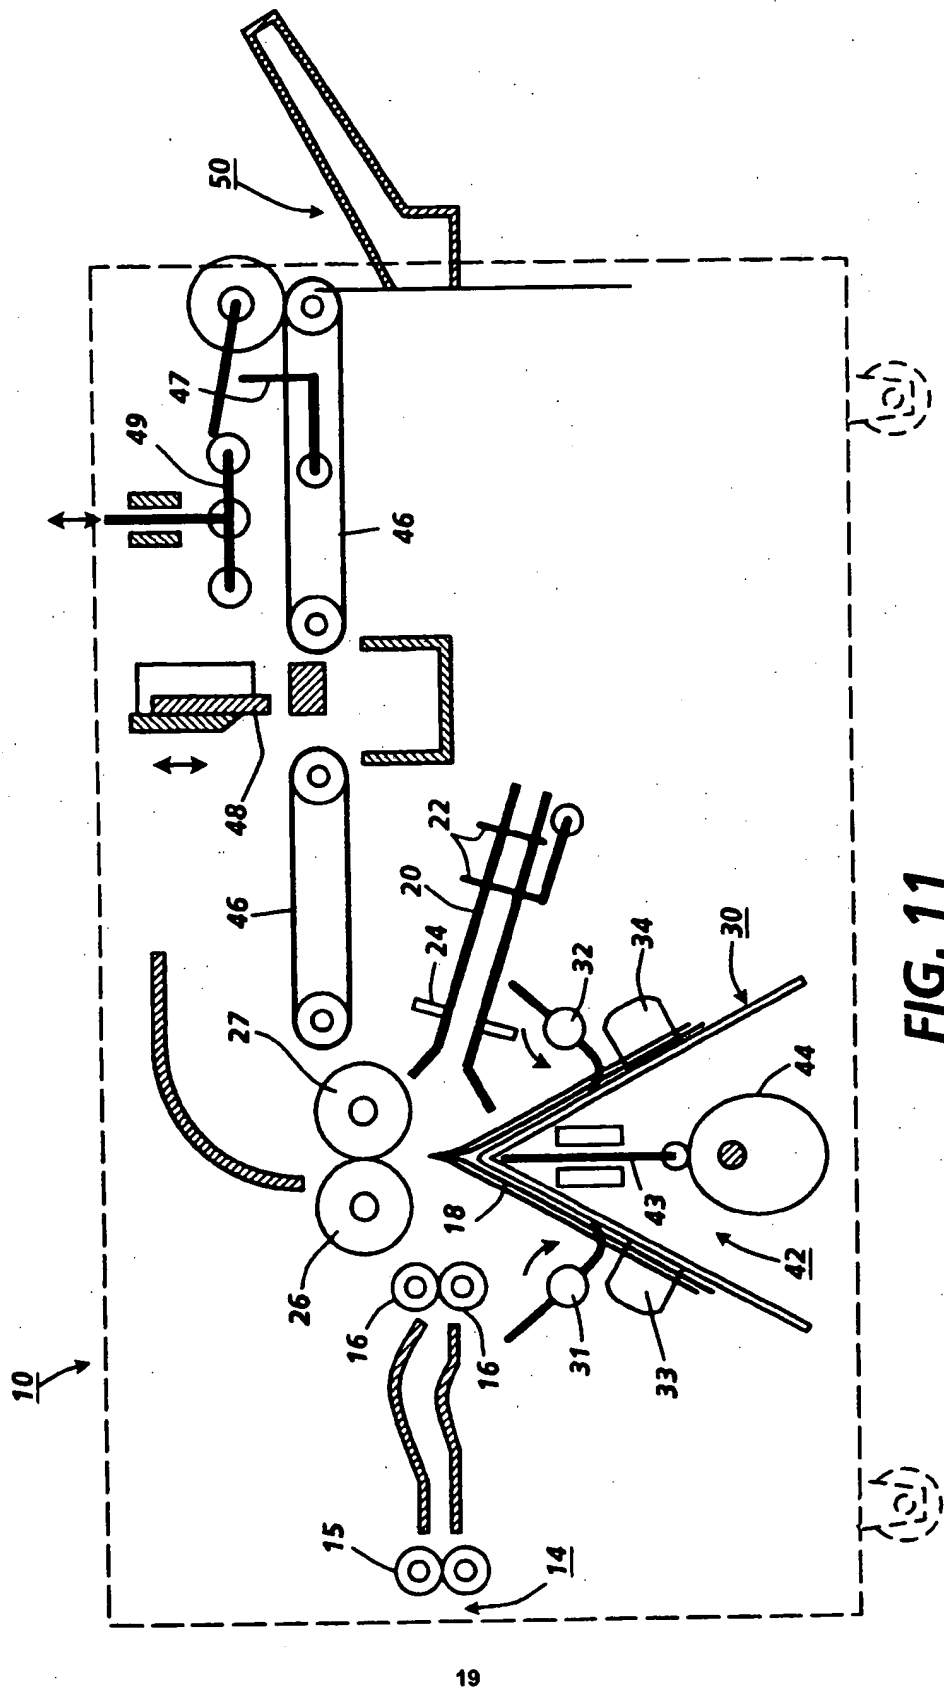
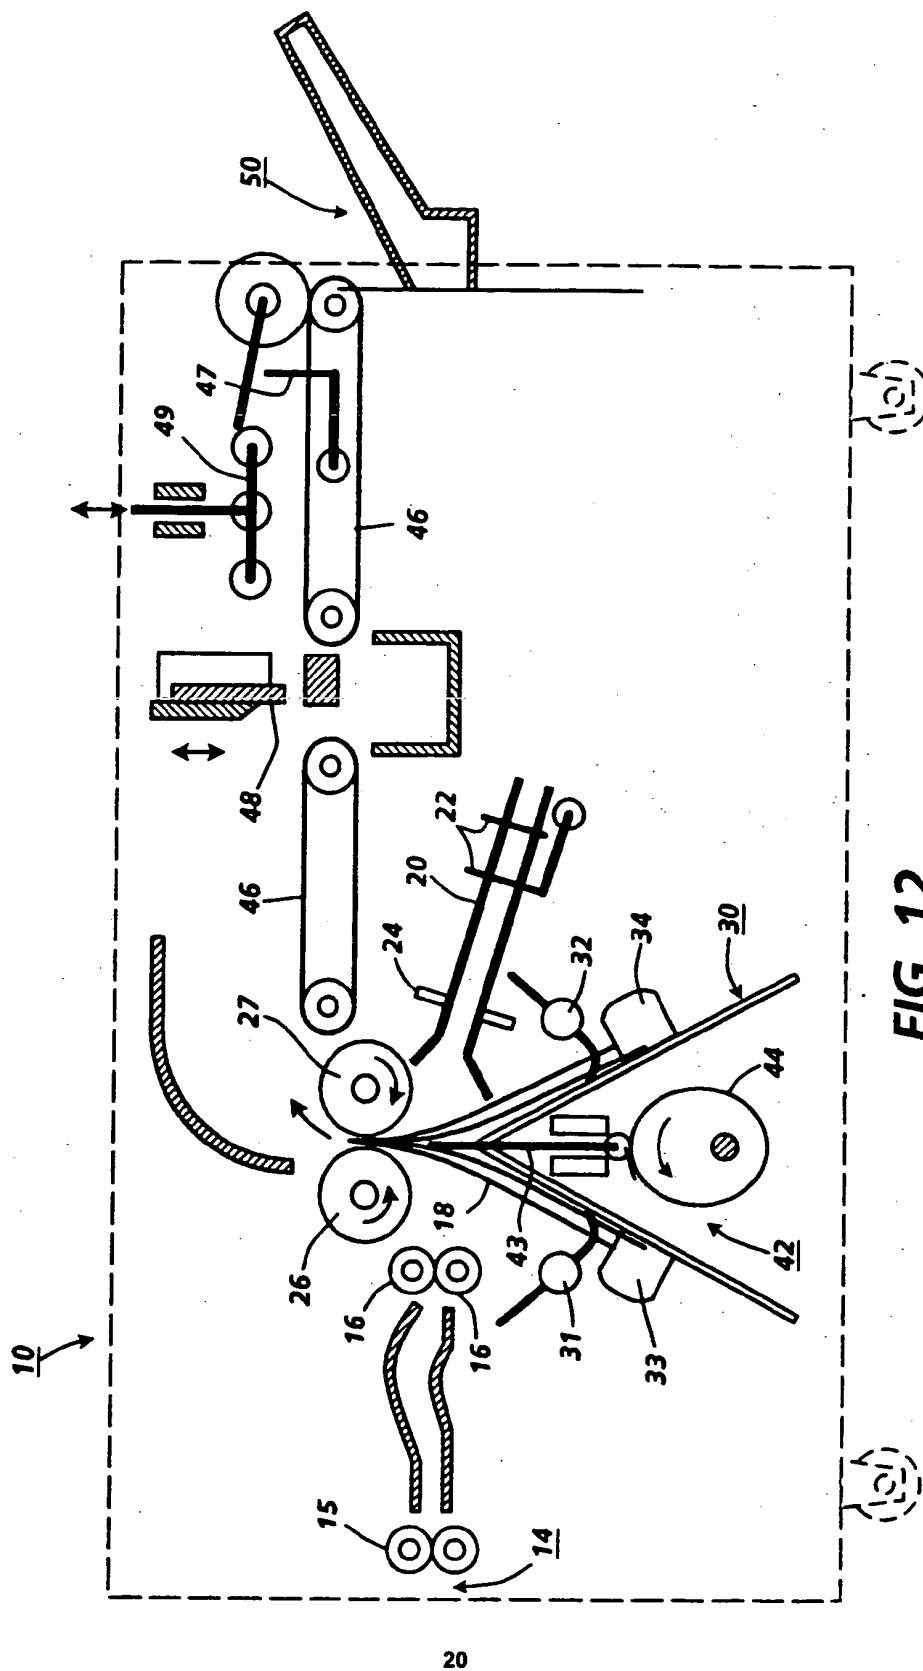


FIG. 8









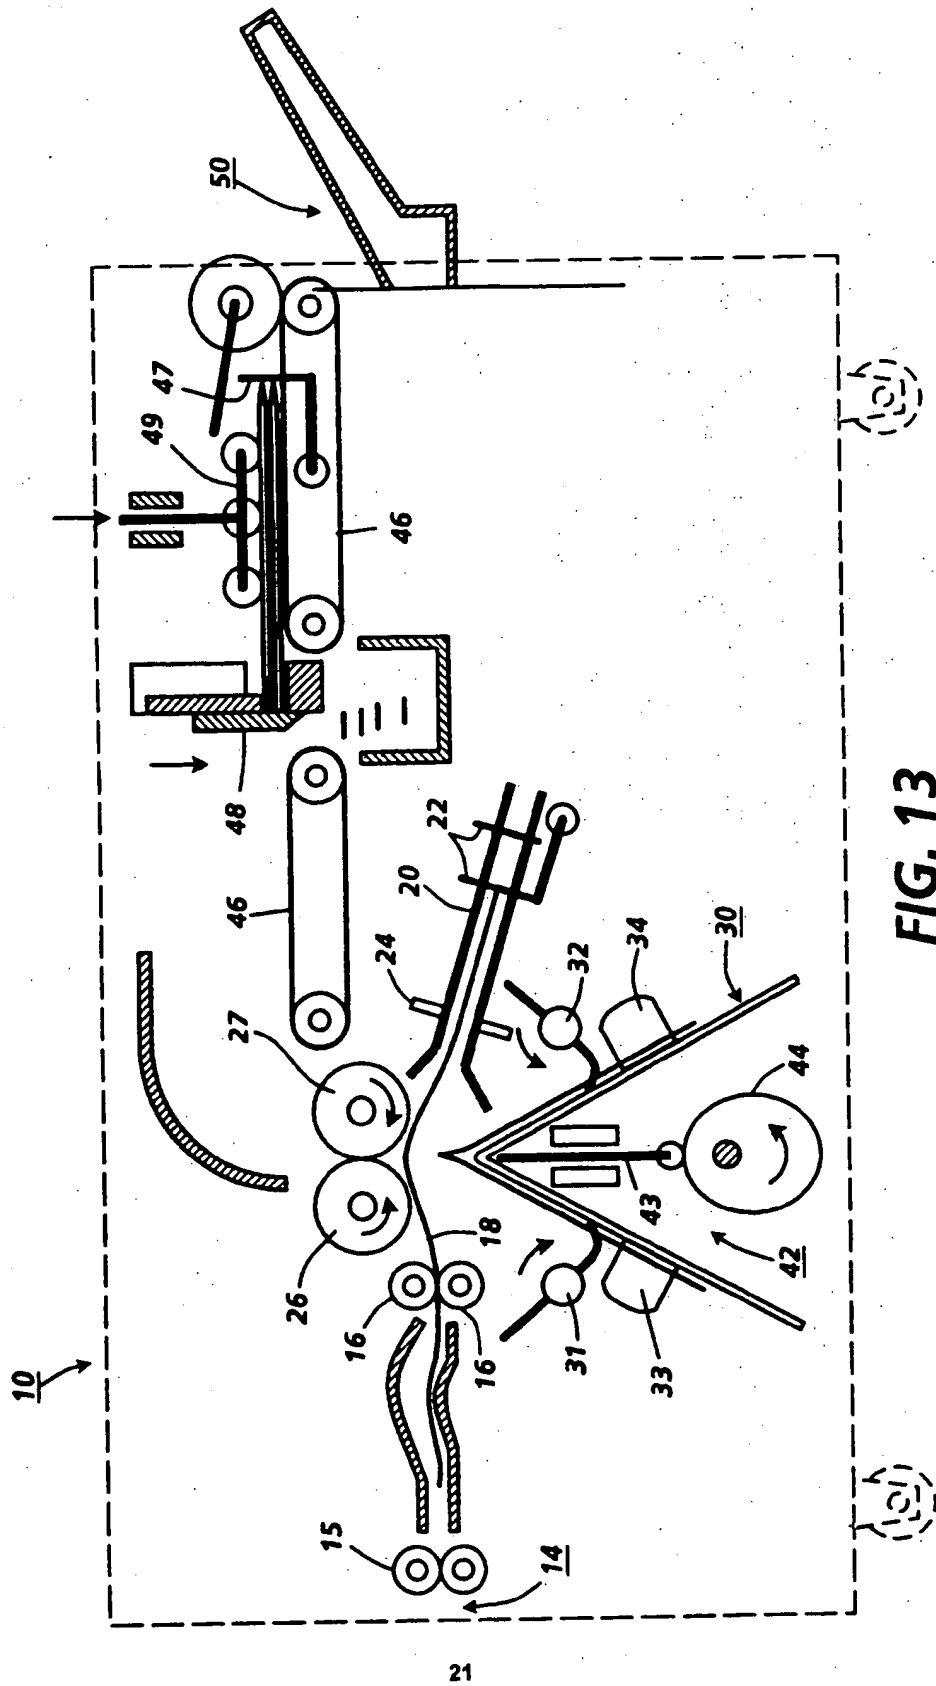


FIG. 13



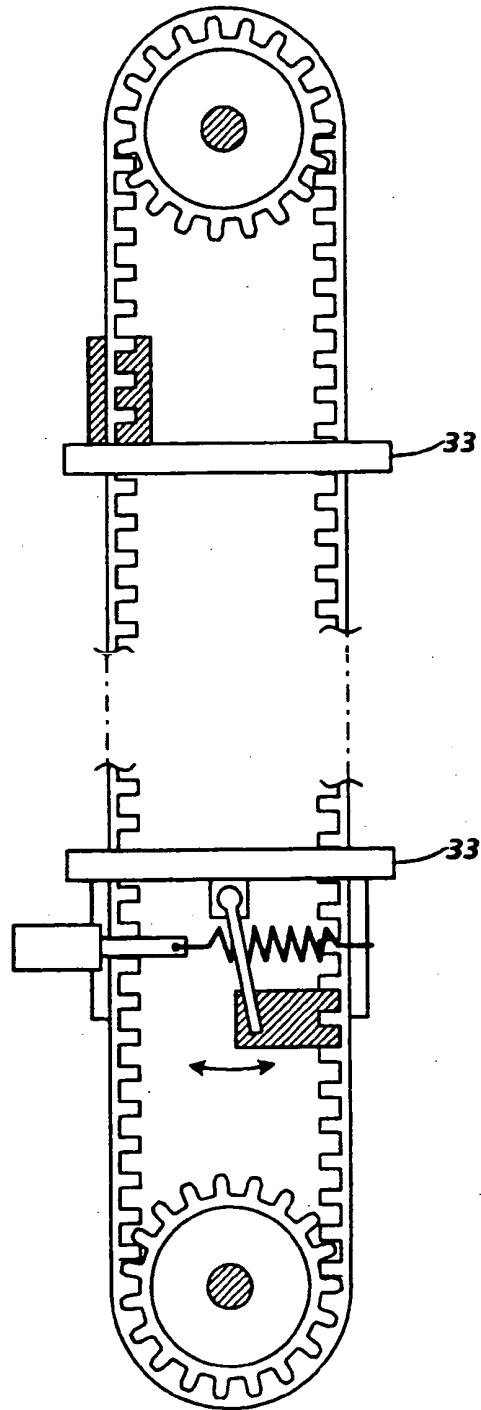


FIG. 14



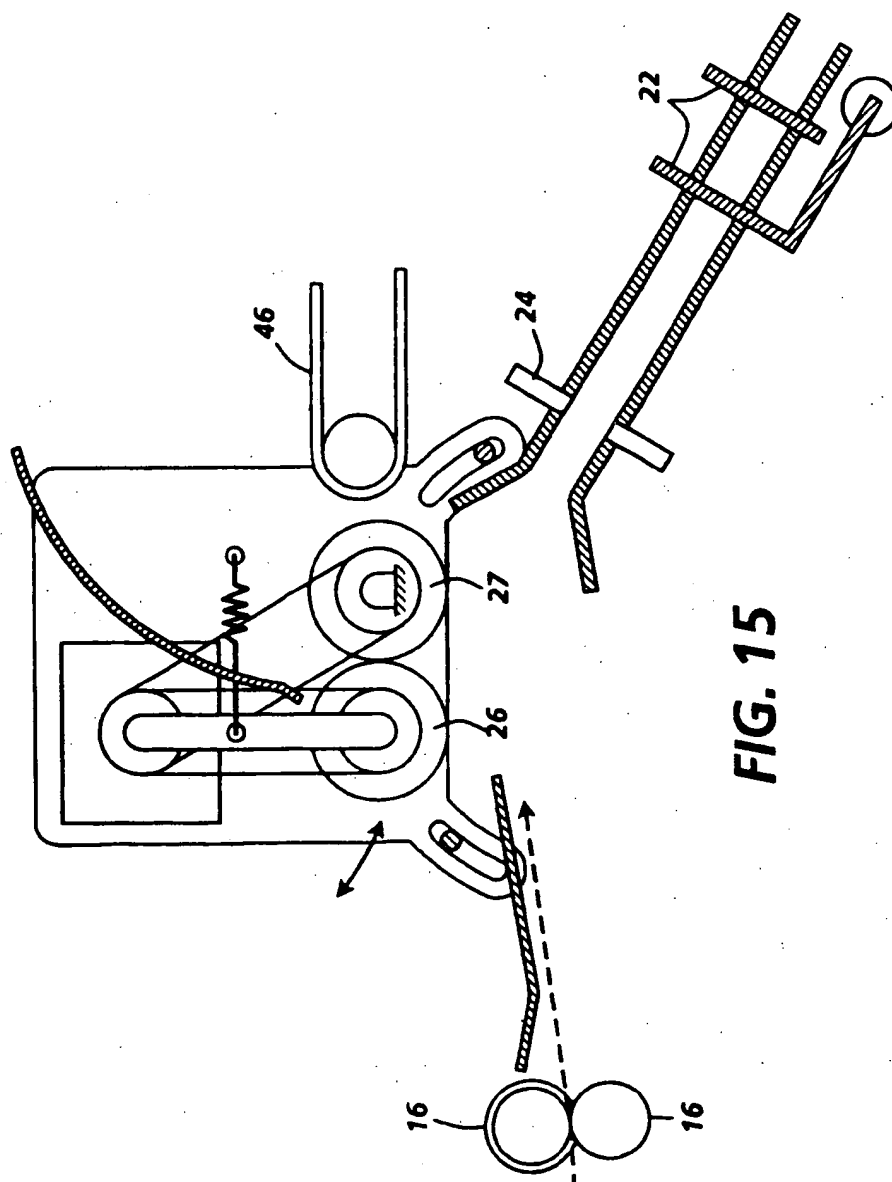

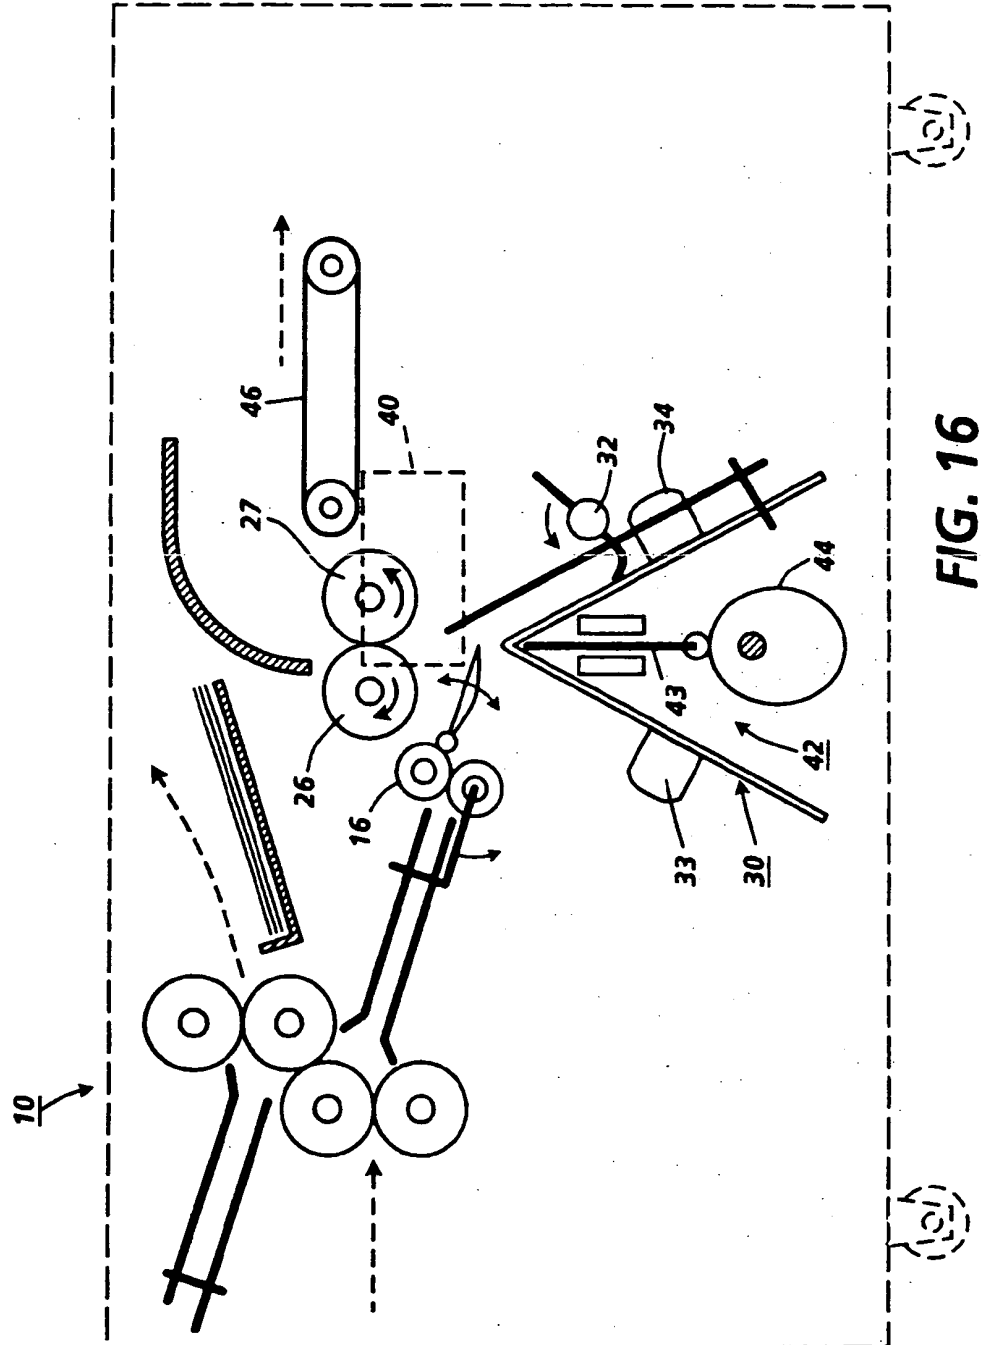

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 30 8201

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,A	US-A-4 592 651 (OIKAWA ET AL.) * the whole document *	1,7	B65H45/12
A	FR-A-2 348 883 (FALTEX HANDELS AG) * the whole document *	1,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			B65H B42C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 February 1995	Examiner Elmeros, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>A : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01.92) (P04-001)

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)